

# Technical data sheet

## Quick pipe T piece, pure white

Item number: 2153951



Fitting for plastic electrical installation pipes to create T branches. Suitable for Quick pipe pipes or corrugated pipes. Toolless closing and opening. Can be used in a temperature range of -25 to +60 °C.



**PP** Polypropylene

### Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 2153951                 |
| Type                               | 3000 TMS M16 RW         |
| Description 1                      | Quick pipe T piece      |
| Manufacturer                       | OBO                     |
| Dimension                          | M16                     |
| Colour                             | Pure white; RAL 9010    |
| Material                           | Polypropylene           |
| Smallest sales unit                | 10                      |
| Unit of quantity                   | Piece                   |
| Weight                             | 0.798 kg                |
| Weight unit                        | kg/100 pc.              |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0784 kg COe / 1 Piece |


# Technical data sheet

## Quick pipe T piece, pure white

Item number: 2153951



### Dimensions

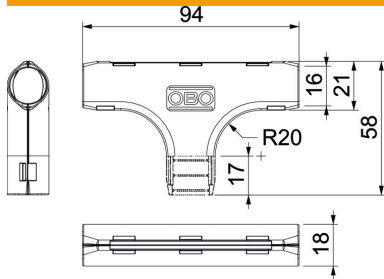

|              |       |
|--------------|-------|
| Dimension B  | 21 mm |
| Dimension B2 | 94 mm |
| Dimension d  | 16 mm |
| Dimension L  | 58 mm |
| Dimension L1 | 17 mm |
| Dimension R  | 20 mm |

### Technical data

|                                   |           |
|-----------------------------------|-----------|
| Version for                       | Connector |
| Shape                             | T piece   |
| Size                              | M16       |
| Halogen-free                      | yes       |
| With sleeve                       | no        |
| Brushed surface                   | no        |
| Polished surface                  | no        |
| Permitted temperature range, max. | 60 °C     |
| Permitted temperature range, min. | 0 °C      |