

# Technical data sheet

## Stainless steel flat conductor



Item number: 5018730

- Can be used as an earthing conductor according to DIN EN 62561-2 (VDE 0185-561-2)
- Corresponds to the requirements of VDE 0185-305 (IEC 62305)
- According to the foundation earth electrode standard DIN 18014, V4A is required in the earth
- For use in areas at risk of corrosion
- For lightning protection, earthing systems and ring equipotential bonding




**A4** Stainless steel

### Master data

Item number	5018730
Type	5052 V4A 30X3.5
Description 1	Steel strip
Description 2	25 m ring
Manufacturer	OBO
Dimension	30x3,5mm
Material	Stainless steel 1.4571/1.4404
Smallest sales unit	25
Unit of quantity	Metre
Weight	82.425 kg
Weight unit	kg/100 m

### Dimensions

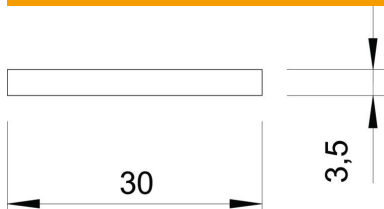

Width	30 mm
Height	3.5 mm
Dimension B	30 mm
Dimension H	3.5 mm

# Technical data sheet

## Stainless steel flat conductor

Item number: 5018730



### Technical data

Normal ring (ca. kg)	21
Nomal ring (approx. m)	25
Length tolerance ±	5 %
Cross-section	105 mm <sup>2</sup>