

# Technical data sheet

Cable tie, white

Item number: 2331816



Cable ties are used for quick, uncomplicated fixing or bundling of cables and pipes to cable support systems or other mounting structures.



**PA** Polyamide

| Master data                        |                         |  |
|------------------------------------|-------------------------|--|
| Item number                        | 2331816                 |  |
| Type                               | 565 2.5x150 WS          |  |
| Description 1                      | Cable ties              |  |
| Manufacturer                       | OBO                     |  |
| Dimension                          | 2,5x150mm               |  |
| Colour                             | White                   |  |
| Material                           | Polyamide               |  |
| Smallest sales unit                | 100                     |  |
| Unit of quantity                   | Piece                   |  |
| Weight                             | 0.047 kg                |  |
| Weight unit                        | kg/100 pc.              |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0021 kg COe / 1 Piece |  |


# Technical data sheet

## Cable tie, white

Item number: 2331816



### Dimensions

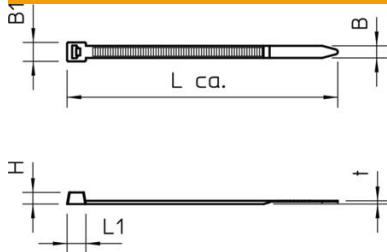

|             |        |
|-------------|--------|
| Length      | 150 mm |
| Width       | 2.5 mm |
| Height      | 1.3 mm |
| Dimension B | 2.5 mm |
| Dimension L | 150 mm |
| Dimension t | 1.3 mm |

### Technical data

|                                   |                    |
|-----------------------------------|--------------------|
| Version for                       | Externally toothed |
| Strip closure                     | Plastic tongue/tab |
| Fastening type                    | Without            |
| Labelling area                    | Without            |
| Halogen-free                      | yes                |
| Releasable lock                   | no                 |
| Max. Bundle diameter              | 39 mm              |
| MIL approval                      | no                 |
| Mounting temperature, max.        | 90 °C              |
| Mounting temperature_min.         | -30 °C             |
| Reflective                        | no                 |
| Permitted temperature range, max. | 90 °C              |
| Permitted temperature range, min. | -30 °C             |
| Transparent                       | no                 |
| UL approval                       | yes                |
| UV-resistant                      | no                 |
| VG approval                       | no                 |
| Tensile strength                  | 80 N               |