

Technical data sheet

Anchor rail AML3518, slot width 16.5 mm, FT, perforated

Item number: 1119672



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.

CE

16,5

H

E30

E90

St

Steel

FT

Hot-dip galvanised

Master data		
Item number		1119672
Description 1		Profile rail
Description 2		perforated, slot 16.5mm
Manufacturer		OBO
Dimension		1000x35x18
Material		Steel
Surface		Hot-dip galvanised
Surface standard		DIN EN ISO 1461
Smallest sales unit		10
Unit of quantity		Metre
Weight		89 kg
Weight unit		kg/100 m
CO Footprint (GWP) Cradle-to-Gate		1,9914 kg COe / 1 Meter


Technical data sheet

Anchor rail AML3518, slot width 16.5 mm, FT, perforated

Item number: 1119672



Dimensions

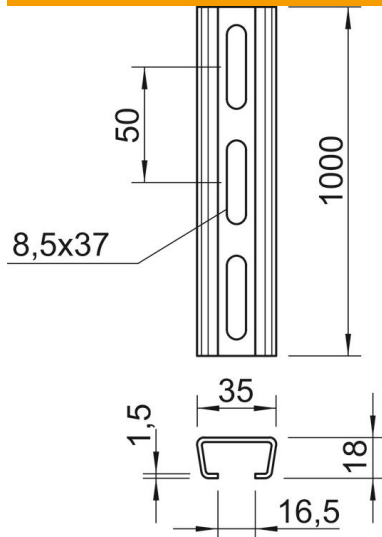

Length	1,000 mm
Width	35 mm
Height	18 mm
Dimension L	1,000 mm

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	50 mm
Bundle	10 m
Maintain electrical functions	yes
Material thickness	1.5 mm
With perforation	yes
With tothing	no
Profile shape	C profile
Slot width	16.5 mm
Static value A	1.01 cm ²
Static value Iy	0.44 cm
Static value Iz	1.84 cm
Static value Wy	0.42 cm ²
Static value Wz	1.05 cm ²