

Technical data sheet

Service pole, type ISSDHSM45

Item number: 6289982



ISS service pole made from aluminium with 45 mm system opening for the direct installation of Modul 45 switching and connection devices.

Pole consisting of:


1 two-compartment pole with stand

Total length 675 mm

2 aluminium covers

Length 675 mm

The design of this service pole is based on an extremely slender, oval aluminium profile, which shows a cover of the Rapid 45 device installation trunking series at both narrow ends of the oval. The 45 mm system opening is suitable for direct acceptance of Modul 45® switching and connection devices. The installation area is theoretically sufficient for 2x 14 Modul 45® devices. If Modul 45connect® is used or in the case of cabling requiring a lot of space, the number of the max. installable devices is reduced. There is the option of installing a partition, type 2371/40 (6023096).



Alu Aluminium

EL Anodised

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 6289982 |
| Type | ISSDHSM45EL |
| Description 1 | Service pole |
| Description 2 | floor |
| Manufacturer | OBO |
| Dimension | 675x80x130 |
| Colour | aluminium |
| Material | Aluminium |
| Surface | Anodised |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 281.5 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 37,7406 kg COe / 1 Piece |



Technical data sheet

Service pole, type ISSDHSM45

Item number: 6289982



Dimensions

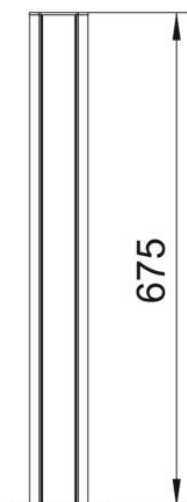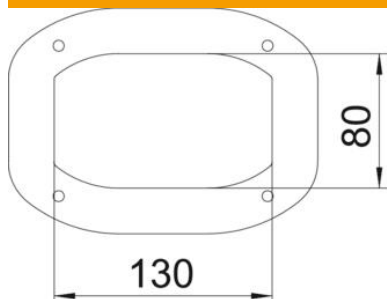

| | |
|--------|--------|
| Length | 675 mm |
| Width | 80 mm |
| Height | 130 mm |

Technical data

| | |
|-------------------------------|--------------|
| Number of usable covers | 2 |
| Number of compartments | 2 St. |
| Version for | Double-sided |
| Fastening type | Stand |
| Floor mounting | yes |
| Ceiling mounting | no |
| Continuous profile | yes |
| Halogen-free | yes |
| Cable entry | Bottom |
| Cover width | 45 mm |
| Changes according to location | no |
| Pole shape | Oval |
| Pole height, min. | 675 mm |
| Adjustable | no |
| Pre-wired | no |