

Technical data sheet

MS4141 mounting rail, slot 22 mm, A2, perforated

Item number: 1122982



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



- A2 Stainless steel
- 2B Bright, treated

| Master data | | |
|------------------------------------|--------------------------|--|
| Item number | 1122982 | |
| Type | MSL4141P6000A2 | |
| Description 1 | Profile rail | |
| Description 2 | perforated, slot 22mm | |
| Manufacturer | OBO | |
| Dimension | 6000x41x41 | |
| Material | Stainless steel | |
| Surface | Bright, treated | |
| Surface standard | | |
| Smallest sales unit | 6 | |
| Unit of quantity | Metre | |
| Weight | 201.1 kg | |
| Weight unit | kg/100 m | |
| CO2 Footprint (GWP) Cradle-to-Gate | 10,2122 kg COe / 1 Meter | |


Technical data sheet

MS4141 mounting rail, slot 22 mm, A2, perforated

Item number: 1122982



Dimensions

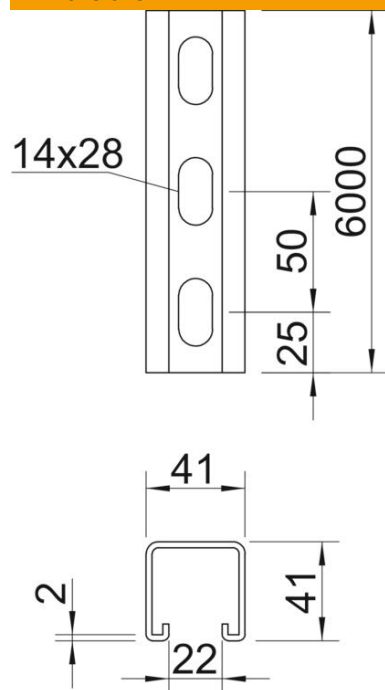

| | |
|-------------|----------|
| Length | 6,000 mm |
| Width | 41 mm |
| Height | 41 mm |
| Dimension L | 6,000 mm |

Technical data

| | |
|-------------------------------|----------------------|
| Breakable | no |
| Type of perforation | Perforated back |
| Version for | Single profile |
| Drill hole spacing, centre | 50 mm |
| Maintain electrical functions | no |
| Hole size | 14x28 mm |
| Material thickness | 2 mm |
| With perforation | yes |
| With toothing | yes |
| Profile shape | C profile |
| Slot width | 22 mm |
| Static value A | 2.45 cm ² |
| Static value I _y | 5.18 cm |
| Static value I _z | 7.56 cm |
| Static value W _y | 2.51 cm ² |
| Static value W _z | 2.69 cm ² |