Technical data sheet

UDHOME2 floor socket, with cord outlet, with floor covering recess, 2x VDE, stainless steel Item number: 7368324



Square floor socket for use in dry-care cavity and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range 25 mm.Frame and cover made of stainless steel and visible in the floor covering. With 2 Modul 45® sockets in the mounting support and an optional data technology support for up to 2 data connection modules.





Stainless steel





Item number	7368324
Туре	UDHOME2 GV15V
Description 1	Floor socket
Description 2	with double VDE socket
Manufacturer	OBO
Dimension	140x140x110
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	230 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	12,8567 kg CO2e / 1 Piece

Technical data sheet

UDHOME2 floor socket, with cord outlet, with floor covering recess, 2x VDE, stainless steel Item number: 7368324



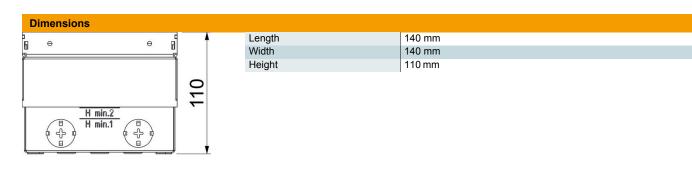



Technical data

Number of installable devices Version for Cable outlet version Equipment Swivellable cord outlet Double VDE socket	
Cable outlet version Swivellable cord outlet Equipment Double VDE socket	
Equipment Double VDE socket	
_4	
Floor covering protection frame no	
Floor care Dry	
Cover version Floor covering recess	
Application when used 6.101.1 Dry floor care	
Application when unused 6.101.1 Dry floor care	
Floor height, max. 135 mm	
Floor height, min. 110 mm	
Suitable for raised floor installation	
Suitable for screed-flush closed underfloor ducts	
Suitable for screed-covered underfloor ducts	
Suitable for cavity floor installation yes	
Suitable for wet care no	
Suitable for underfloor ducts no	
Device support to accept mounting boxes no	
With floor covering recess yes	
Nominal size for device installation units	
Standard EN 50085-2-2	
Frame version Floor covering contact ed	lge

Technical data sheet

UDHOME2 floor socket, with cord outlet, with floor covering recess, 2x VDE, stainless steel Item number: 7368324



Technical data		
	Protection rating (IP) when used	IP20
	Protection rating (IP) when unused	IP40
	Protection rating IK code	IK10
	Heavy-duty version	no
	Vertical load, small area	to 3,000 N
	Approvals	VDE
	Opening mechanism	Handle
	Floor covering thickness	15 mm