

Technical data sheet

Device installation trunking Signa Base 70130

Item number: 6132726



Trunking base of the Signa Base device installation trunking for covered cable routing and device installation in internal areas. The scope of delivery contains two trunking couplings.

Trunking base with base perforation for direct mounting on the wall. Direction changes with the fittings and close the trunking ends with end pieces.

Tested according to DIN EN 50085-1 and DIN EN 50085-2-1.

Order the base and cover separately.



PVC Polyvinylchloride

Master data

Item number	6132726
Type	BRK 70130 rws
Description 1	Device installation trunking
Description 2	SIGNA BASE 70x130 9010
Manufacturer	OBO
Colour	Pure white; RAL 9010
Material	Polyvinylchloride
Smallest sales unit	2
Unit of quantity	Metre
Weight	130.35 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	2,2729 kg COe / 1 Meter


Technical data sheet

Device installation trunking Signa Base 70130

Item number: 6132726



Dimensions

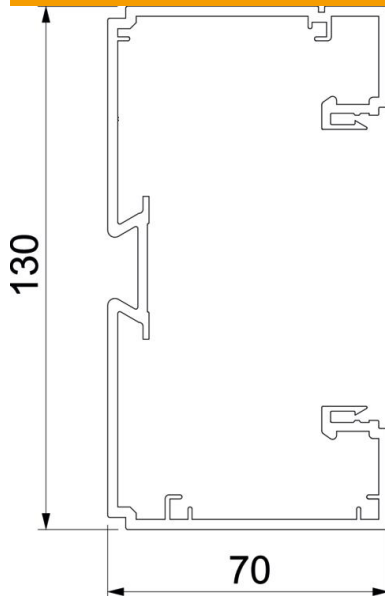

Length	2,000 mm
Width	130 mm
Height	70 mm

Technical data

Number of covers	1
Number of insertable partitions	1
Rear panel version (inner side)	Continuous DIN rail
Rectangular shape	yes
Halogen-free	no
Cable retaining clip	no
Duct connector	yes
Cover mounting type	Internal
Mounting perforation in base	yes
Usable cross-section	7456 mm ²
Cover supplied	no
Cover width	79 mm
Protection rating	IP40
Protective film	yes
Protection rating IK code	IK07.
Symmetrical	no
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C